ADAMS RITE
MANUFACTURING CO.
4040 S. CAPITOL AVE.
CITY OF INDUSTRY, CALIFORNIA 91749

TITLE:
MASTER
REINFORCEMENT SHEET
FOR 3000/8000 SERIES
EXIT DEVICES

DATE: 08-28-97

TEMPLATE NUMBER:
10001-0

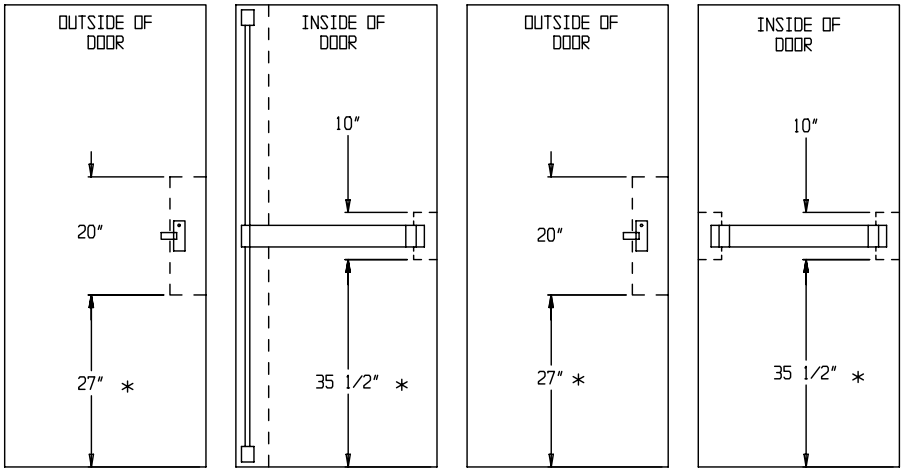

VERTICAL ROD DEVICES

RIM OR MORTISE DEVICES

IMPORTANT NOTES:

1. Choose correct hand of door.
2. Reinforcements to be 5" (minimum) wide or full width of stile.
3. Reinforcement on outside of door required only if outside trim is used.
4. Reinforcement to be adequate for the drilling and tapping of machine screws. 3600/8500 CVR devices, the combined thickness of door skin and reinforcement should be .125 to .180 inch. (Example: 18 Ga. door with 12 Ga. reinforcement)
5. Refer to templates listed for additional cut-outs and tapped hole requirements.
6. Shields are recommended on Mortise Lock installations to protect the lock, device and trim from the door insulation.

SUGGESTED REINFORCEMENT PLAN

STANDARD HEIGHT OF PUSHBAR:
41-13/16" (OR AS SPECIFIED *)

* IF SPECIFIED PUSHBAR HEIGHT IS NON-STANDARD, ADJUST REINFORCEMENT LOCATION TO BE CENTERED ON THE SPECIFIED PUSHBAR HEIGHT.

CONTROL NO.	DATE
CUSTOMER NAME	
JOB NAME	
CUSTOMER ORDER NO.	

DEVICE	TEMP. NO.	TRIM	TEMP. NO.	STRIKE	TEMP. NO.	MISC.	TEMP. NO.