


HEADER STOP

* 1 7/16 FOR METAL FRAME
1 1/2 FOR WOOD FRAME

1 7/16*

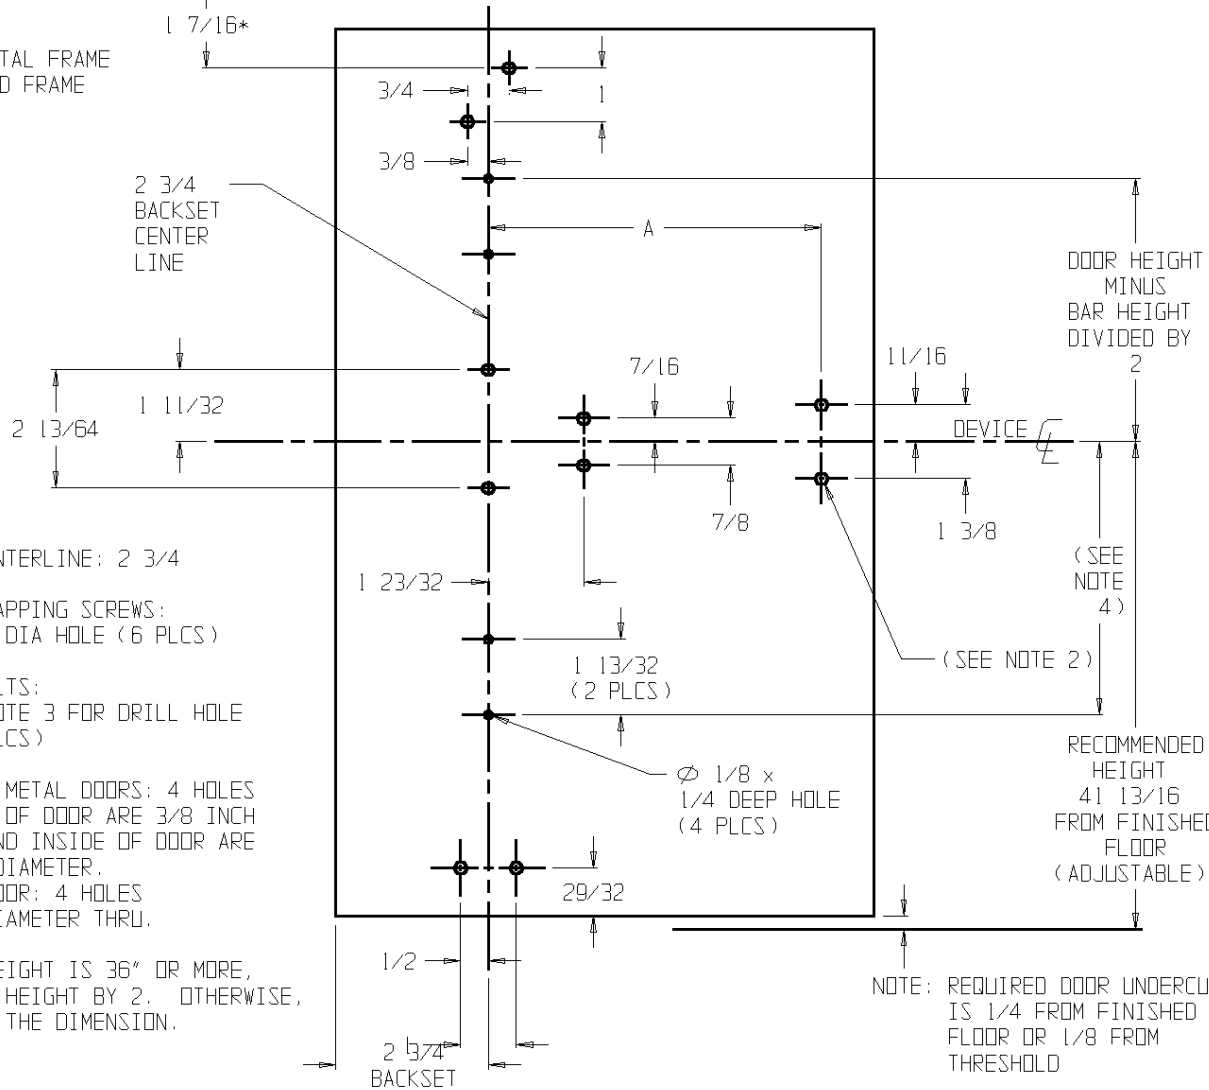

DOOR HEIGHT MINUS
BAR HEIGHT
DIVIDED BY
2

DEVICE

(SEE NOTE 4)

(SEE NOTE 2)

RECOMMENDED
HEIGHT
41 13/16
FROM FINISHED
FLOOR
(ADJUSTABLE)

NOTE 1: BACKSET CENTERLINE: 2 3/4

NOTE 2: FOR SELF-TAPPING SCREWS:
DRILL 1/8" DIA HOLE (6 PLCS)

FOR SEX BOLTS:
REFER TO NOTE 3 FOR DRILL HOLE
SIZES (6 PLCS)

NOTE 3: FOR HOLLOW METAL DOORS: 4 HOLES
ON OUTSIDE OF DOOR ARE 3/8 INCH
DIAMETER AND INSIDE OF DOOR ARE
7/32 INCH DIAMETER.
FOR WOOD DOOR: 4 HOLES
3/8 INCH DIAMETER THRU.

NOTE 4: WHEN BAR HEIGHT IS 36" OR MORE,
DIVIDE BAR HEIGHT BY 2. OTHERWISE,
USE 18" AS THE DIMENSION.

NOTE: REQUIRED DOOR UNDERCUT
IS 1/4 FROM FINISHED
FLOOR OR 1/8 FROM
THRESHOLD

NOTE: IT IS RECOMMENDED THE MOUNTING
HOLES BE PREPARED IN THE FIELD.

LHR PREPARATION SHOWN.
SEE 10050 FOR RHR.

DIM A	DOOR OPENING WIDTH			
	30"	36"	42"	48"
	24 1/4	30 1/4	36 1/4	42 1/4

ADAMS RITE MANUFACTURING COMPANY
CITY OF INDUSTRY, CA 91749

8100 EXIT DEVICE LHR FOR
WOOD OR HOLLOW METAL DOOR

PART NO.
80-0180-195T

NOTE: SEE MASTER SHEET 10001 FOR
SUGGESTED REINFORCEMENT

TEMPLATE NO.:
10051-0

DATE:
09/14/95